



Role of the chemical structure of ionic liquids in their ecotoxicity and reactivity towards Fenton oxidation



Macarena Munoz^{a,*}, Carmen M. Domínguez^a, Zahara M. de Pedro^a, Asunción Quintanilla^a, Jose A. Casas^a, Sónia P.M. Ventura^b, João A.P. Coutinho^b

^a Ingeniería Química, Universidad Autónoma de Madrid, Crta. Colmenar km 15, 28049 Madrid, Spain

^b Departamento de Química, CICECO, Universidade de Aveiro, Campus Universitário de Santiago, 3810-193 Aveiro, Portugal

ARTICLE INFO

Article history:

Received 8 December 2014

Received in revised form 7 July 2015

Accepted 8 July 2015

Available online 9 July 2015

Keywords:

Ionic liquid
Fenton oxidation
Degradation
Toxicity
Anion
Cation

ABSTRACT

The production and application of ionic liquids (ILs) is often associated with the formation of aqueous effluents. Due to the well-known toxicity and poor biodegradability of those compounds, effective treatments for their removal from aqueous solutions are required. In this work, the Fenton oxidation methodology under optimum operating conditions (50 mg L⁻¹ Fe³⁺, stoichiometric dose of H₂O₂, 70 °C and pH₀ = 3) was investigated in eleven different ILs, based in the imidazolium, phosphonium, quaternary ammonium, pyridinium and cholinium families, conjugated with various inorganic and organic anions such as chloride, cyanoborate, cyanamide, thiocyanate, dimethylphosphate and tosylate. The efficacy of the process was evaluated by the analysis of the chemical oxygen demand (COD), total organic carbon (TOC), the acids formed by ILs oxidation and the toxicity of the non-treated and treated aqueous effluents towards the *Vibrio fischeri* bacteria. It was possible to identify the main compounds produced upon Fenton oxidation in the final aqueous effluents (acetic, oxalic and formic acids) and the results seem to suggest that the Fenton oxidation is a good degradation methodology for most of the ILs tested, achieving TOC conversions in the range of 40–80% and 30–40% for aromatic and aliphatic ILs, respectively. Furthermore, non-toxic effluents were obtained at the end of the treatment for all the ILs investigated with the exception of the cyano-based ones due to the release of highly toxic cyanide species to the aqueous medium.

© 2015 Elsevier B.V. All rights reserved.

1. Introduction

The synthesis of ILs often takes place in aqueous media, and their industrial application also involves aqueous effluents [1,2]. It can thus be expected the presence of ILs in aqueous industrial effluents related with their manufacture and use. Various authors reported successful studies on the IL's recovery and recyclability after some specific processes for several consecutive cycles [3–5] being the main criteria for the choice of the IL recovery process, the IL concentration [6,7]. However, their recyclability may be limited to a certain number of cycles by the accumulation of the contaminant/impurities which concentration may become too high rendering them unusable [6]. Moreover the IL recovery may not be practical when dealing with dilute solutions [6]. In this context, the development of efficient chemical treatments for the degradation of such persistent, non-biodegradable and/or high toxic compounds has been the focus of considerable research efforts in the

last few years [8], principally for water streams with low amounts of IL. Advanced oxidation processes (AOPs), based on the action of hydroxyl radicals at near ambient temperature and pressure, have been proposed as an interesting alternative by several authors [9–16]. Included in the AOPs, Fenton oxidation represents the most realistic approach for the degradation of ILs in water, due to its simplicity and cost-efficiency [17]. So far, the few works reported dealing with the treatment of ILs by Fenton oxidation have been focused on the degradation of imidazolium-based ILs at ambient and mild conditions [18–20]. Although the viability of the process has been demonstrated, since the complete conversion of the IL ([C₂mim]Cl) within 90 min of exposure was achieved ([IL]₀ = 1 mM; [Fe³⁺]₀ = 1 mM; [H₂O₂]₀ = 400 mM), high excess of H₂O₂ was used, and information about the evolution of total organic carbon (TOC) or toxicity, which is crucial for the potential application of Fenton oxidation, was not provided [20]. In a recent contribution, we applied the Fenton process to degrade four ILs' families ([IL]₀ = 1000 mg L⁻¹), viz. imidazolium, pyridinium, ammonium and phosphonium, at different operating conditions, establishing that 70 °C, the stoichiometric amount of H₂O₂ and a Fe³⁺

* Corresponding author.

E-mail address: macarena.munoz@uam.es (M. Munoz).

dose of 50 mg L⁻¹ allowed the complete conversion of ILs with more than 60% TOC reduction, giving rise to non-toxic effluents within 4 h of reaction time [21]). In the same line, we also demonstrated the efficiency of this process working at those operating conditions for the degradation of imidazolium-based ILs taking into account their structure characteristics, represented by the length of the alkyl chain (C₂–C₁₆) and the nature of the counter anion (Cl⁻, [CH₃SO₃]⁻, [CH₃SO₄]⁻, [CH₃CO₂]⁻) [22]. However, the potential application of the Fenton process to the treatment of IL-based wastewaters still remains an open question due to the wide range of anions and cations that need to be tested. For instance, the degradation of aliphatic cations such as cholinium and quaternary ammonium structures as well as complex anions such as tosylate or cyano-containing ones has not been yet studied. In this context, the aim of this work is to analyze the capability of the Fenton process for the degradation of a wide variety of ILs, considering the influence of the chemical structure of anion and cation, on their reactivity towards Fenton oxidation under the operating conditions previously reported [21,22] and the ecotoxicity of the non-treated and treated effluent. The evolution of the chemical oxygen demand (COD), Total Organic Carbon (TOC), the type of acids formed and the toxicity of the Fenton oxidation effluents towards the *Vibrio fischeri* marine luminescent bacteria, upon oxidation were evaluated.

2. Materials and methods

2.1. Chemicals

All chemicals were analytical grade reagents and were used without further purification. The molecular structure of the eleven ILs studied is provided in Fig. 1. These ILs are: 1-ethyl-3-methylimidazolium chloride, [C₂mim]Cl (98% of purity); 1-butyl-4-methylpyridinium chloride, [C₄mpyr]Cl (98% of purity); 1-ethyl-3-methylimidazolium tetracyanoborate, [C₂mim][B(CN)₄] (98% of purity); 1-ethyl-3-methylimidazolium dicyanamide, [C₂mim][N(CN)₂] (>98% of purity); 1-ethyl-3-methylimidazolium tricyanomethanide, [C₂mim][C(CN)₃] (>98% of purity); 1-ethyl-3-methylimidazolium thiocyanate, [C₂mim][SCN] (98% of purity); 1-ethyl-3-methylimidazolium dimethylphosphate, [C₂mim][DMP] (98% of purity); 1-ethyl-3-methylimidazolium tosylate, [C₂mim][TOS] (99% of purity); tetrabutylammonium chloride, [N_{4,4,4,4}]Cl (97% of purity); tetrabutylphosphonium chloride, [P_{4,4,4,4}]Cl (98% of purity); and cholinium chloride, [Chol]Cl (98% of purity), all purchased at Iolitec – Ionic Liquids Technologies, Fluka, Sigma–Aldrich®, or kindly offered by Cytec (phosphonium-based IL). Hydrogen peroxide solution (30 wt.%) in a stable form and nitric acid (65%) were purchased from Sigma–Aldrich®. Iron (III) nitrate nonahydrate (purity of 98%) was acquired at Panreac.

2.2. Fenton experiments

The oxidation runs were carried out in 100 mL stirred glass bottles placed in a constant-temperature bath at an equivalent stirring velocity of 200 rpm. The reaction volume was 50 mL, and the reactants were added simultaneously at the beginning of each oxidation run. Briefly, the IL solution (48 mL, 1000 mg L⁻¹) at pH = 3 (HNO₃) was placed in the reactor and heated to 70 °C. When the temperature was at steady state, 1 mL of an H₂O₂ solution at the appropriate concentration (the theoretical stoichiometric amount necessary for the complete mineralization of the IL), and 1 mL of the Fe(NO₃)₃ aqueous solution (50 mg L⁻¹ Fe³⁺ in the reactor) were injected. After 4 h of reaction, the heating was switched-off and the samples were diluted and immediately analyzed. The toxicity of

the effluents was measured once the reactor was cooled to room temperature and the residual hydrogen peroxide was removed with sodium bisulfite (<10% of the initial hydrogen peroxide concentration in all experiments realized). The experiments were performed in triplicate, being the standard deviation obtained always less than 5%.

2.3. Analytical methods

The progress of the reaction was followed by measuring TOC, COD, the toxicity of the effluents obtained after the Fenton oxidation, and the concentration of short-chain organic acids produced. The TOC parameter was measured with a TOC analyzer (Shimadzu TOC V_{SCH}). COD measurements were performed by the Moore method [23]. Short-chain organic acids were analyzed by ion chromatography with chemical suppression (Metrohm 790 IC) using a conductivity detector. A Metrosep A supp 5–250 column (25 cm length, 4 mm internal diameter) was used as the stationary phase and an aqueous solution of Na₂CO₃ (3.2 mM) as the mobile phase. The hydrogen peroxide concentration was determined by colorimetric titration with an UV 2100 Shimadzu UV–VIS spectrophotometer [24].

2.4. Microtox® acute toxicity assays

The toxicity of the IL solutions and the corresponding Fenton oxidation effluents was determined by a standard toxicity test conducted with the luminescent bacteria *V. fischeri*, strain NRRL B–11177 (Microtox®; Azur Environmental 1998). This test was performed using a range of diluted aqueous solutions (from 0% to 100%) of each pure IL or Fenton sample. The experiments were conducted at 15 °C, with osmotic pressure adjusted to values closer to 2% NaCl and pH between 6 and 8. The EC₅₀ is defined as the effective nominal concentration (mM) that reduces the intensity of light emission by 50% after 15 min of contact time between each sample and the bacteria. For complex samples, like the Fenton oxidation effluents, IC₅₀ is used, and it is defined as the reciprocal of the dilution percentage giving rise to 50% reduction of light emission. The toxicity units (TU) were calculated and are inversely proportional to the biological toxicity expressed as IC₅₀ values.

3. Results and discussion

3.1. Fenton oxidation of ILs

Table 1 collects the results obtained upon Fenton oxidation of all ILs investigated. In general, ILs were effectively oxidized by the Fenton process, which is demonstrated by the high reduction values of COD and TOC. Moreover, the COD/TOC ratio, which indicates the extent of the overall reaction [25], was also significantly reduced during the treatment. Aromatic ILs, such as imidazolium and pyridinium families showed in general higher mineralization degrees than the aliphatic ones, in particular cholinium, quaternary ammonium and phosphonium cations. This can be explained by the presence of double bonds in the aromatic ILs. These results are in good agreement with previous works dealing with the oxidation of aliphatic compounds by Fenton treatment, in which it was observed that unsaturated compounds were more prone to oxidation by hydroxyl radicals because of their electron-rich double bonds [26–28]. Actually, the IL containing both aromatic cation and anion, the [C₂mim][TOS], showed the highest conversion values of TOC and COD.

It is well-known that the final products obtained upon Fenton oxidation of organic compounds are non-toxic short-chain organic acids [29,30]. Table 2 shows the concentration of those compounds

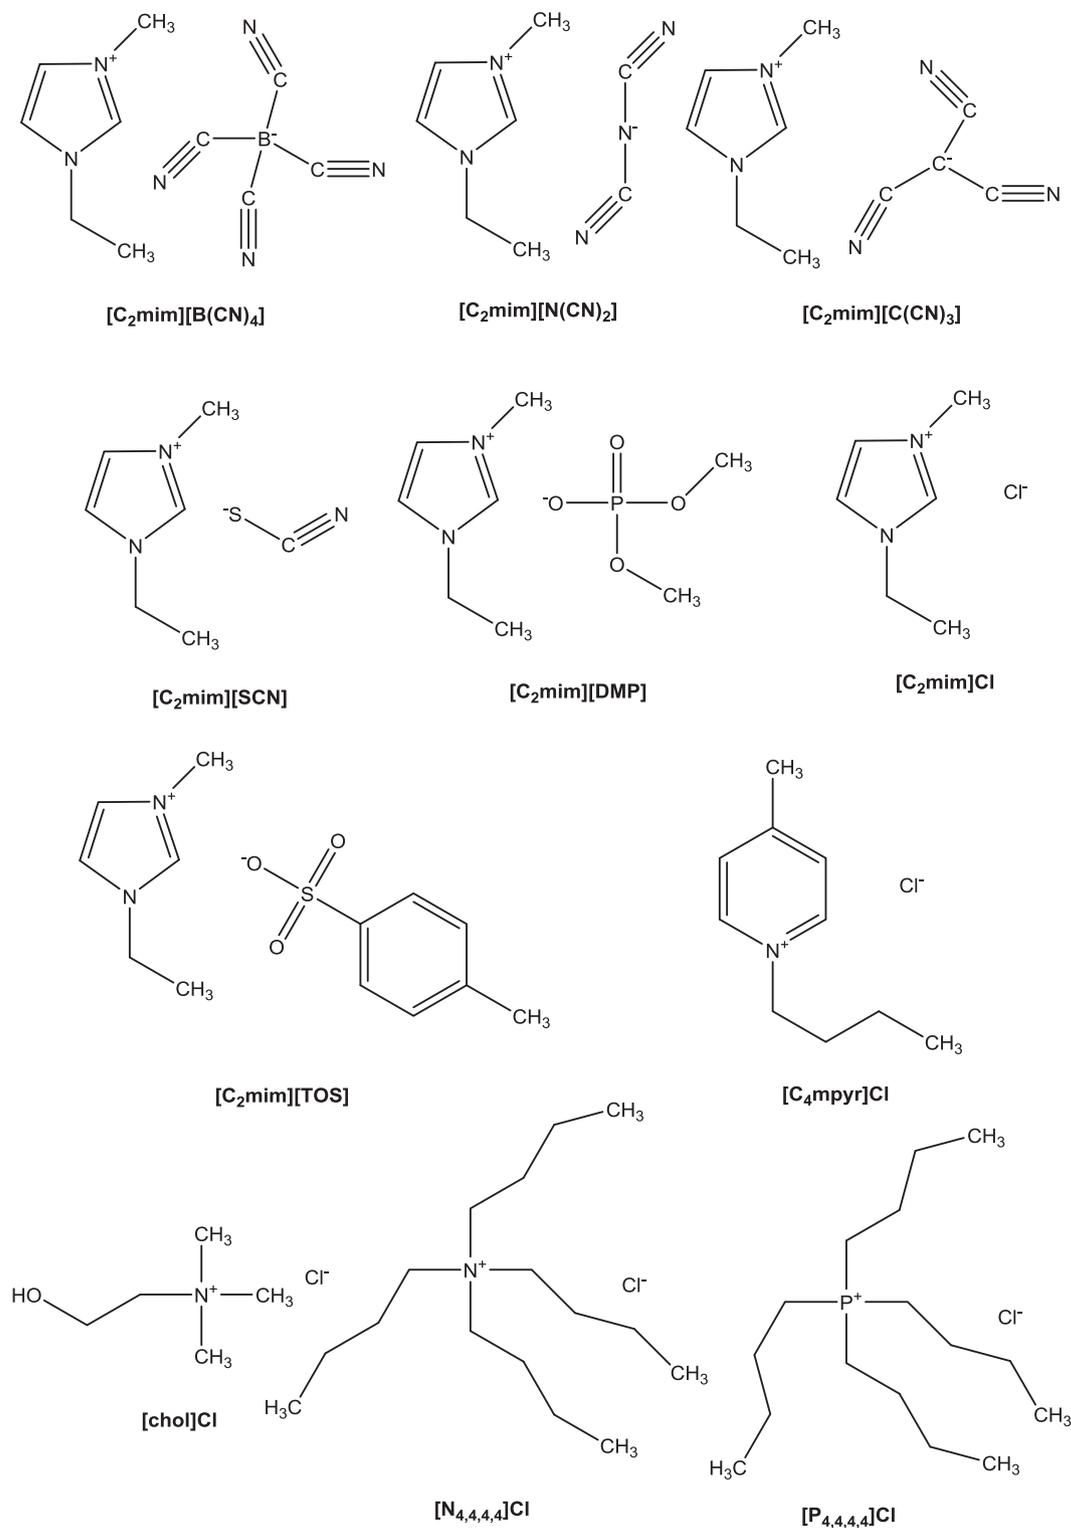


Fig. 1. Chemical structure of the ILs studied in this work, and respective abbreviation.

present in the final Fenton effluents of the eleven ILs tested in this work. As observed, acetic, oxalic and formic acids were more abundantly present in the effluents originated in the Fenton oxidation, since they present high resistance to further oxidation, whereas fumaric, maleic and malonic acids are firstly formed and then degraded upon the treatment [31–33]. With the exception of the ILs based in cyano- anions ([B(CN)₄], [N(CN)₂], [C(CN)₃], [SCN]) and [chol]Cl, short-chain organic acids represented the main

products obtained from the ILs' Fenton oxidation, being the proportion of carbon in the form of short-chain organic acids around 40–60% of the residual TOC. In the particular case of the cyano-based ILs, it has to be considered the presence of cyanide species (C≡N⁻), released during the treatment, highly refractory to the ·OH radicals attack. The contribution of those species to the initial TOC for [C₂mim][B(CN)₄], [C₂mim][C(CN)₃], [C₂mim][N(CN)₂], and [C₂mim][SCN] are 46%, 40%, 30% and 15%,

Table 1

Results obtained after the Fenton oxidation of ILs ($[IL]_0 = 1000 \text{ mg L}^{-1}$; $[Fe^{3+}]_0 = 50 \text{ mg L}^{-1}$; $[H_2O_2]_0 = \text{stoichiometric amount}$; $T = 70 \text{ }^\circ\text{C}$; $pH_0 = 3$).

Ionic Liquid	TOC ₀ (mg L ⁻¹)	COD ₀ (mg L ⁻¹)	X _{TOC} (%)	X _{COD} (%)	COD ₀ / TOC ₀	COD _f / TOC _f
[C ₂ mim][B(CN) ₄]	531	1168	49.9	71.1	2.2	1.3
[C ₂ mim][N(CN) ₂]	542	1264	56.3	68.3	2.3	1.7
[C ₂ mim][C(CN) ₃]	640	1563	40.7	73.6	2.4	1.1
[C ₂ mim][SCN]	496	1418	67.3	72.7	2.9	2.4
[C ₂ mim][DMP]	508	1456	44.1	47.2	2.9	2.7
[C ₂ mim][TOS]	553	1643	77.8	80.2	3.0	2.7
[C ₂ mim]Cl	516	1751	65.3	77.4	3.4	2.0
[C ₄ mpyr]Cl	656	2210	43.7	61.2	3.3	2.3
[chol]Cl	430	1662	36.1	45.7	3.9	3.3
[N _{4,4,4,4}]Cl	652	2275	38.2	63.1	3.5	2.1
[P _{4,4,4,4}]Cl	681	2459	28.2	49.6	3.6	2.5

respectively, which explains the lower contribution of short-chain organic acids in these cases as well as the differences obtained among them.

3.2. Evaluation of toxicity of pure ILs and effluents generated during the Fenton oxidation

Table 3 reports the toxicity values obtained from the Microtox[®] acute toxicity test for the Fenton oxidation effluents of the ILs studied and also for the IL solutions as starting contaminants (1000 mg L⁻¹). The first observation is that the values of toxicity reported for the IL solutions are quite different from those previously reported in literature [34] for example in the case of [chol]Cl, due to the maintenance of the osmotic pressure and pH. In this context, no comparisons between these ILs results of toxicity and literature will be carried out. The Microtox[®] treatment was here adopted as an easy method to directly compare the toxicity of the pre and post oxidation IL effluent samples. As observed in the results reported in Table 3, most of the effluents were non-toxic or showed negligible toxicity values, which is particularly important in the case of pyridinium, quaternary ammonium and phosphonium families, since they presented significant toxicity values before the treatment ($TU_{[C_4mpyr]Cl} = 3.4$, $TU_{[N_{4,4,4,4}]Cl} = 2.1$, $TU_{[P_{4,4,4,4}]Cl} = 5.8$). However, it has to be highlighted a dramatic increase of toxicity when cyano-based ILs were treated ([C₂mim][B(CN)₄], [C₂mim][C(CN)₃] and [C₂mim][SCN]). As previously mentioned, it can be directly related to the degradation of the anion and subsequent release of highly toxic cyanide species. Interestingly, [C₂mim][N(CN)₂] was the only cyano-based IL which did not show any toxicity increase upon the Fenton oxidation. This fact can be explained by the higher resistance of the N=C≡N bond of the anion towards ·OH radicals, which prevents the release of toxic cyanide species.

Summing up, in this work, it was demonstrated the capacity of Fenton oxidation to degrade ILs with a variety of cations and

Table 3

Toxicity parameters, EC₅₀ in mM and TU at 15 min of exposure time for the 1000 mg L⁻¹ IL solutions and the Fenton oxidation effluents originated after 4 h of Fenton reaction.

Ionic liquid	EC ₅₀ (mM)	TU at 15 min	Fenton effluent (TU at 15 min)
[C ₂ mim][B(CN) ₄]	4.1	1.1	4.1
[C ₂ mim][N(CN) ₂]	23.5	0.2	Non-toxic*
[C ₂ mim][C(CN) ₃]	3.6	1.4	18.0
[C ₂ mim][SCN]	28.1	0.2	11.0
[C ₂ mim][DMP]	30.3	0.1	1.5
[C ₂ mim][TOS]	70.8	0.1	Non-toxic*
[C ₂ mim]Cl	27.1	0.3	Non-toxic*
[C ₄ mpyr]Cl	1.6	3.4	0.1
[chol]Cl	–	Non-toxic*	1.7
[N _{4,4,4,4}]Cl	1.7	2.1	Non-toxic*
[P _{4,4,4,4}]Cl	0.6	5.8	0.2

Non-toxic* < 0.01 TU.

anions. However, it is notorious, from the present results and others previously reported in literature [6], that the best approach for dealing with an ionic liquid requires a simultaneous attention to the cation and the anion. Cyano-based ILs are good examples of problematic anions, where compounds more toxic than the original ions may result from the oxidation reaction. These results emphasize the need to make an adequate choice of the degradation or recovery method to be applied to each particular IL contaminated effluent.

4. Conclusions

The treatment of a wide variety of ILs in water including aliphatic cations *viz.* cholinium and quaternary ammonium structures as well as complex anions *viz.* tosylate or cyano-based, by Fenton oxidation has been studied, showing that this process is an efficient technique for the degradation of most of them. In general, aromatic ILs are more readily oxidized than the aliphatic ones, due to the presence of unsaturated bonds, showing the IL containing both aromatic cation and anion ([C₂mim][TOS]), the highest oxidation ($X_{COD} = 80\%$) and mineralization ($X_{TOC} = 78\%$).

Except for the ILs based in anions with cyano groups, short-chain organic acids represented the main oxidation products obtained after the Fenton treatment, originating non-toxic effluents or showing negligible toxicity values, which is particularly important in the case of pyridinium, quaternary ammonium and phosphonium families, since, before the treatment, they presented significant toxicities. Special attention has to be paid to the nature of IL since a dramatic increase of toxicity has been observed for cyano-based ILs treated by Fenton oxidation, as consequence of the anion degradation and the subsequent release of highly toxic cyanide to the aqueous medium. Therefore, it is important to make

Table 2

Short-chain organic acids obtained upon the Fenton oxidation of all ILs.

Ionic liquid	Maleic (mg L ⁻¹)	Fumaric (mg L ⁻¹)	Malonic (mg L ⁻¹)	Acetic (mg L ⁻¹)	Oxalic (mg L ⁻¹)	Formic (mg L ⁻¹)	$\sum C_{\text{organic acids}}/TOC$ (%)
[C ₂ mim][B(CN) ₄]	0.0	0.0	0.6	15.9	12.8	1.1	11.2
[C ₂ mim][N(CN) ₂]	0.0	0.0	0.0	28.6	2.8	17.6	21.2
[C ₂ mim][C(CN) ₃]	0.0	0.0	0.0	12.5	0.3	29.5	11.8
[C ₂ mim][SCN]	0.0	0.0	0.0	30.6	15.5	5.2	27.7
[C ₂ mim][DMP]	0.0	0.0	0.0	29.8	0.0	42.1	32.9
[C ₂ mim][TOS]	0.0	0.0	0.0	39.1	16.7	3.1	54.8
[C ₂ mim]Cl	0.0	9.4	5.5	46.5	130.2	107.9	47.6
[C ₄ mpyr]Cl	3.2	19.8	31.7	227.7	184.4	146.8	53.2
[chol]Cl	0.0	0.0	5.5	0.0	0.4	3.8	3.8
[N _{4,4,4,4}]Cl	0.0	3.5	36.0	221.8	73.0	89.4	59.0
[P _{4,4,4,4}]Cl	0.0	0.0	46.3	219.9	54.6	118.2	44.1

a correct choice of the degradation or recovery method to be applied in each IL contaminated effluent.

Acknowledgements

The authors wish to thank the Spanish MICINN for financial support through the projects CTQ2010-14807 and S2013/MAE-2716. They are also grateful for financial support from FEDER through Programa Operacional Fatores de Competitividade – COMPETE and national funds through FCT – Fundação para a Ciência e Tecnologia within CICECO project – FCOMP-01-0124-FEDER-037271 (Ref^a. FCT PEst-C/CTM/LA0011/2013) and PTDC/AAC-AMB/119172/2010. S.P.M. Ventura acknowledges financial support from FCT through her post-doctoral grant SFRH/BPD/79263/2011.

References

- [1] A.K. Burrell, R.E. Del Sesto, S.N. Baker, T.M. McCleskey, G.A. Baker, The large scale synthesis of pure imidazolium and pyrrolidinium ionic liquids, *ACS Symp. Ser.* 9 (2007) 449–454.
- [2] N.V. Plechkova, K.R. Seddon, Applications of ionic liquids in the chemical industry, *Chem. Soc. Rev.* 37 (2008) 123–150.
- [3] S.I. Abu-Eishah, Ionic liquids recycling for reuse, in: S. Handy (Ed.), *Ionic Liquids—Classes and Properties*, 2011, 239–272.
- [4] E. Alvarez-Guerra, S.P.M. Ventura, J.A.P. Coutinho, A. Irabien, Ionic liquid-based three phase partitioning (ILTPP) systems: ionic liquid recovery and recycling, *Fluid Phase Equilib.* 371 (2014) 67–74.
- [5] E. Alvarez-Guerra, A. Irabien, S.P.M. Ventura, J.A.P. Coutinho, Ionic liquid recovery alternatives in ionic liquid-based three-phase partitioning (ILTPP), *AIChE J.* 60 (2014) 3577–3586.
- [6] E.M. Siedlecka, M. Czerwicka, J. Neumann, P. Stepnowski, J.F. Fernández, J. Thöming, *Ionic Liquids: Methods of Degradation and Recovery in Ionic Liquids: Theory, Properties, New Approaches*, 2011.
- [7] N.L. Mai, K. Ahn, Y. Koo, Methods for recovery of ionic liquids—a review, *Process Biochem.* 49 (2014) 872–881.
- [8] M.C. Bubalo, K. Radošević, I.R. Redovniković, J. Halambek, V.G. Srček, A brief overview of the potential environmental hazards of ionic liquids, *Ecotoxicol. Environ. Saf.* 99 (2014) 1–12.
- [9] A.W. Morawski, M. Janus, I. Goc-Maciejewska, A. Syguda, J. Pernak, Decomposition of ionic liquids by photocatalysis, *Pol. J. Chem.* 79 (2005) 1929–1935.
- [10] X. Li, J. Zhao, Q. Li, L. Wang, S.C. Tsang, Ultrasonic chemical oxidative degradations of 1,3-dialkylimidazolium ionic liquids and their mechanistic elucidations, *Dalton Trans.* (2007) 1875–1880.
- [11] M. Czerwicka, S. Stolte, A. Müller, E.M. Siedlecka, M. Gołębowski, J. Kumirska, P. Stepnowski, Identification of ionic liquid breakdown products in an advanced oxidation system, *J. Hazard. Mater.* 171 (2009) 478–483.
- [12] T. Itakura, K. Hirata, M. Aoki, R. Sasai, H. Yoshida, H. Itoh, Decomposition and removal of ionic liquid in aqueous solution by hydrothermal and photocatalytic treatment, *Environ. Chem. Lett.* 7 (2009) 343–345.
- [13] A. Fabianska, T. Ossowski, P. Stepnowski, S. Stolte, J. Thöming, E.M. Siedlecka, Electrochemical oxidation of imidazolium-based ionic liquids: the influence of anions, *Chem. Eng. J.* 198–199 (2012) 338–345.
- [14] E.M. Siedlecka, S. Stolte, M. Gołębowski, A. Nienstedt, P. Stepnowski, J. Thöming, Advanced oxidation process for the removal of ionic liquids from water: the influence of functionalized side chains on the electrochemical degradability of imidazolium cations, *Sep. Purif. Technol.* 101 (2012) 26–33.
- [15] H. Zhou, P. Lv, Y. Shen, J. Wang, J. Fan, Identification of degradation products of ionic liquids in an ultrasound assisted zero-valent iron activated carbon microelectrolysis system and their degradation mechanism, *Water Res.* 47 (2013) 3514–3522.
- [16] H. Zhou, Y. Shen, P. Lv, J. Wang, J. Fan, Degradation of 1-butyl-3-methylimidazolium chloride ionic liquid by ultrasound and zero-valent iron/activated carbon, *Sep. Purif. Technol.* 104 (2013) 208–213.
- [17] S. Esplugas, J. Giménez, S. Contreras, E. Pascual, M. Rodríguez, Comparison of different advanced oxidation processes for phenol degradation, *Water Res.* 36 (2002) 1034–1042.
- [18] E.M. Siedlecka, M. Gołębowski, J. Kumirska, P. Stepnowski, Identification of 1-butyl-3-methylimidazolium chloride degradation products formed in Fe(III)/H₂O₂ oxidation system, *Chem. Anal. (Warsaw)* 53 (2008) 943–951.
- [19] E.M. Siedlecka, M. Gołębowski, Z. Kaczynski, J. Czupryniak, T. Ossowski, P. Stepnowski, Degradation of ionic liquids by Fenton reaction; the effect of anions as counter and background ions, *Appl. Catal., B* 91 (2009) 573–579.
- [20] E.M. Siedlecka, W. Mroziak, Z. Kaczynski, P. Stepnowski, Degradation of 1-butyl-3-methylimidazolium chloride ionic liquid in a Fenton-like system, *J. Hazard. Mater.* 154 (2008) 893–900.
- [21] M. Munoz, C.M. Domínguez, Z.M. de Pedro, A. Quintanilla, J.A. Casas, J.J. Rodríguez, Ionic liquids breakdown by Fenton oxidation, *Catal. Today* 240–A (2015) 16–21.
- [22] C.M. Domínguez, M. Munoz, A. Quintanilla, Z.M. de Pedro, S.P.M. Ventura, J.A.P. Coutinho, J.A. Casas, J.J. Rodríguez, Degradation of imidazolium-based ionic liquids in aqueous solution by Fenton oxidation, *J. Chem. Technol. Biotechnol.* 89 (2014) 1197–1202.
- [23] E.W. Rice, R.B. Baird, A.D. Eaton, L.S. Clesceri, 5220 D. Closed reflux, colorimetric method, *Standard Methods for the Examination of Water and Wastewater*, 22nd ed., 2012.
- [24] G.M. Eisenberg, Colorimetric determination of hydrogen peroxide, *Ind. Eng. Chem. Res.* 15 (1943) 327–328.
- [25] I.A. Balcioglu, I. Arslan, Partial oxidation of reactive dyestuffs and synthetic textile dye-bath by the O₃ and O₃/H₂O₂ processes, *Water Sci. Technol.* 43 (2001) 221–228.
- [26] W.Z. Tang, S. Tassos, Oxidation kinetics and mechanisms of trihalomethanes by Fenton's reagent, *Water Res.* 5 (1997) 1117–1125.
- [27] E. Neyens, J. Baeyens, A review of classic Fenton's peroxidation as an advanced oxidation technique, *J. Hazard. Mater.* B98 (2003) 33–50.
- [28] M. Munoz, Z.M. de Pedro, J.A. Casas, J.J. Rodríguez, Chlorophenols breakdown by a sequential hydrodechlorination-oxidation treatment with a magnetic Pd-Fe/γ-Al₂O₃ catalyst, *Water Res.* 47 (2013) 3070–3080.
- [29] J.A. Zazo, J.A. Casas, C.B. Molina, A. Quintanilla, J.J. Rodríguez, Evolution of ecotoxicity upon Fenton's oxidation of phenol in water, *Environ. Sci. Technol.* 41 (2007) 7164–7170.
- [30] M. Munoz, Z.M. de Pedro, J.A. Casas, J.J. Rodríguez, Assessment of the generation of chlorinated byproducts upon Fenton-like oxidation of chlorophenols at different conditions, *J. Hazard. Mater.* 190 (2011) 993–1000.
- [31] E. Chamarro, A. Marco, S. Esplugas, Use of Fenton reagent to improve organic chemical biodegradability, *Water Res.* 35 (2001) 1047–1051.
- [32] J. Carriazo, E. Guélou, J. Barrault, J.M. Tatibouët, R. Molina, S. Moreno, Catalytic wet peroxide oxidation of phenol by pillared clays containing Al–Ce–Fe, *Water Res.* 39 (2005) 3891–3899.
- [33] J.A. Zazo, J.A. Casas, A.F. Mohedano, M.A. Gilarranz, J.J. Rodríguez, Chemical pathway and kinetics of phenol oxidation by Fenton's reagent, *Environ. Sci. Technol.* 39 (2005) 9295–9302.
- [34] F.A. Silva, F. Siopa, B.F. Figueiredo, A.M. Gonçalves, J.L. Pereira, F. Gonçalves, J.A. Coutinho, C.A. Afonso, S.P. Ventura, Sustainable design for environment-friendly mono and dicationic cholinium-based ionic liquids, *Ecotoxicol. Environ. Saf.* 108 (2014) 302–310.